

## U Product Use

WEpaint is a write-erase paint that can be applied over smooth surfaces as easily as traditional paint. White paint gives traditional whiteboard like look. Clear, high-gloss finish will transform any color walls, doors, columns, and more into durable, long-lasting surfaces that wipe clean, resist common marks, and hold up to daily wear.

## i Technical Details

<b>Chemistry</b>	Hybrid Sol-gel technology
<b>Use</b>	Interior Only
<b>Viscosity</b>	Ready to use
<b>Flammability</b>	Non Flammable
<b>Coverage</b>	As mentioned on Kit
<b>Solvent</b>	Solvent less paint (<1%)
<b>VOC</b>	<100 gm/litre
<b>Method of Application</b>	Roller, Brush
<b>Pot life (After mixing)</b>	1 hr
<b>Drying Time</b>	1 hr Touch dry, Tack free 3 hours
<b>Recoat Time</b>	No need. Single coat only
<b>Thinning</b>	Do not thin or add any solvent
<b>Temperature Stability</b>	Dry heat up to 140 degree
<b>Shelf life (in container)</b>	1 year in sealed can

## f Performance

- Use any standard whiteboard marker (not the permanent please) of any color for writing on WEpainted surface.
- Use a piece of cloth, duster, dry-erase cleaner, or wipes to erase


## W Warranty

- WEpaint is highly durable and resistant to most household wear n tear & chemical. WEpaint comes with 5 year warranty and guaranteed not to crack, peel, stain, yellow or fade with proper use and maintenance.


## X Precaution

- For best results, the surface should be as smooth as possible.
- Do WEpaint application at temperatures between 15° C and 50° C and below 85% relative humidity.
- Do not tint WEpaint with any colorants
- Do not add/mix solvent/water
- Do not write with permanent marker


## V Variants

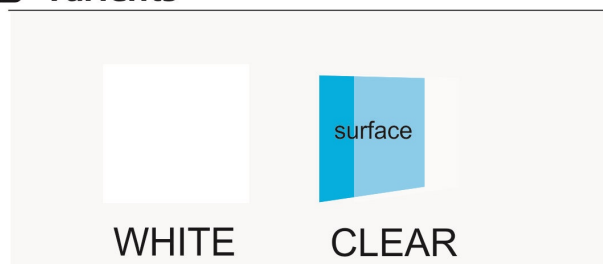

## P Product Properties

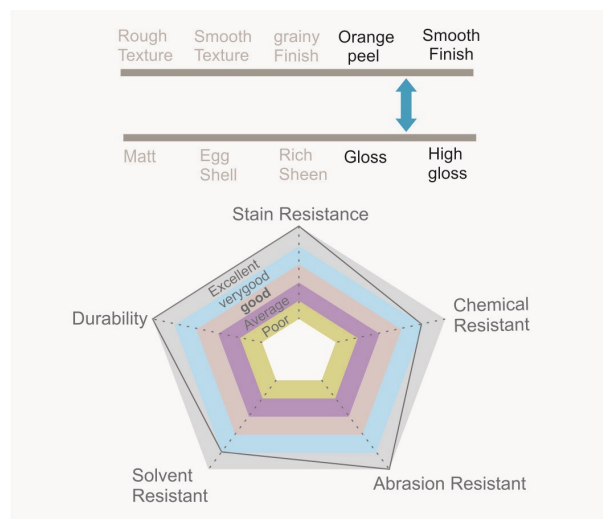

## f Surface Recommendation

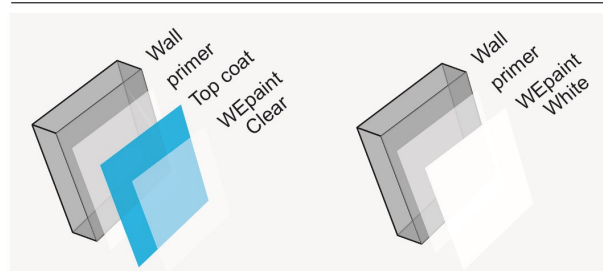

- WEpaint White is recommended on previously primed (white emulsion primer/oil based primer) or white base coat
- WEpaint clear is a top-coat over egg shell, high sheen, gloss paint. Not on primer.

## h Health and Safety

- Kindly refer to the MSDS which gives detailed information on safety measures while handling the paint, which is available on request.
- Keep out of reach of children.
- Ensure good ventilation during application and drying.